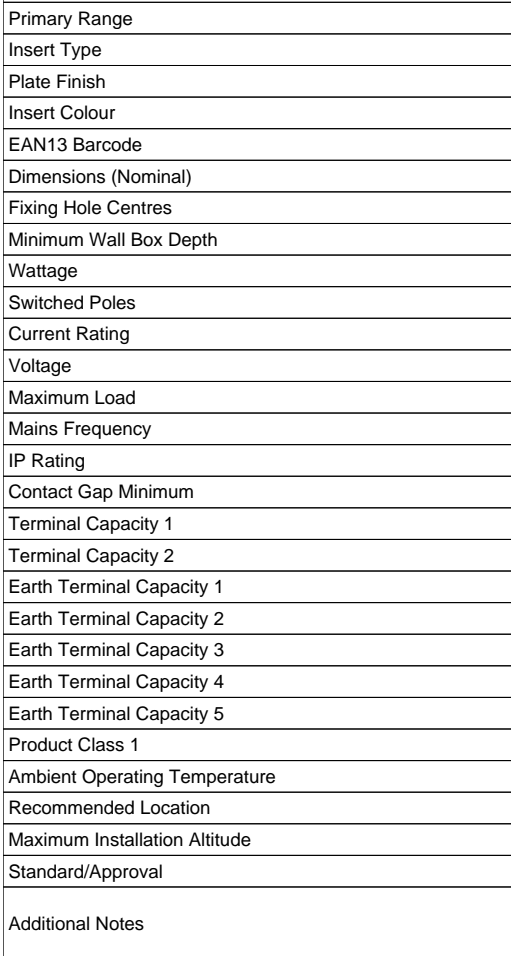
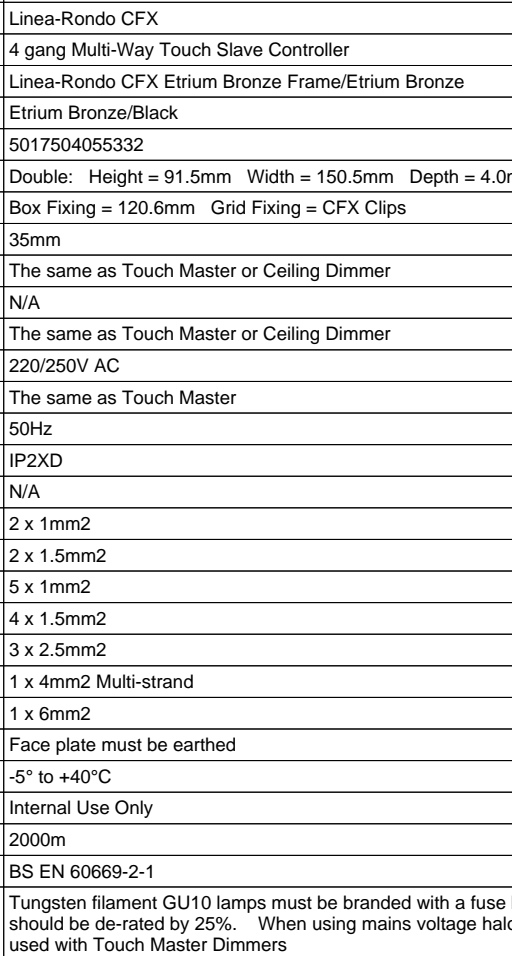



LRX4XTSEB-EBB

Linea-Rondo CFX Etrium Bronze Frame/Etrium Bronze Front 4 gang Multi-Way Touch Slave Controller Etrium Bronze/Black

Item Image	Wiring	Dimensions
		
	<p>Primary Range</p> <p>Insert Type</p> <p>Plate Finish</p> <p>Insert Colour</p> <p>EAN13 Barcode</p> <p>Dimensions (Nominal)</p> <p>Fixing Hole Centres</p> <p>Minimum Wall Box Depth</p> <p>Wattage</p> <p>Switched Poles</p> <p>Current Rating</p> <p>Voltage</p> <p>Maximum Load</p> <p>Mains Frequency</p> <p>IP Rating</p> <p>Contact Gap Minimum</p> <p>Terminal Capacity 1</p> <p>Terminal Capacity 2</p> <p>Earth Terminal Capacity 1</p> <p>Earth Terminal Capacity 2</p> <p>Earth Terminal Capacity 3</p> <p>Earth Terminal Capacity 4</p> <p>Earth Terminal Capacity 5</p> <p>Product Class 1</p> <p>Ambient Operating Temperature</p> <p>Recommended Location</p> <p>Maximum Installation Altitude</p> <p>Standard/Approval</p>	<p>Linea-Rondo CFX</p> <p>4 gang Multi-Way Touch Slave Controller</p> <p>Linea-Rondo CFX Etrium Bronze Frame/Etrium Bronze</p> <p>Etrium Bronze/Black</p> <p>5017504055332</p> <p>Double: Height = 91.5mm Width = 150.5mm Depth = 4.0mm</p> <p>Box Fixing = 120.6mm Grid Fixing = CFX Clips</p> <p>35mm</p> <p>The same as Touch Master or Ceiling Dimmer</p> <p>N/A</p> <p>The same as Touch Master or Ceiling Dimmer</p> <p>220/250V AC</p> <p>The same as Touch Master</p> <p>50Hz</p> <p>IP2XD</p> <p>N/A</p> <p>2 x 1mm²</p> <p>2 x 1.5mm²</p> <p>5 x 1mm²</p> <p>4 x 1.5mm²</p> <p>3 x 2.5mm²</p> <p>1 x 4mm² Multi-strand</p> <p>1 x 6mm²</p> <p>Face plate must be earthed</p> <p>-5° to +40°C</p> <p>Internal Use Only</p> <p>2000m</p> <p>BS EN 60669-2-1</p>
<p>Additional Notes</p>	<p>Tungsten filament GU10 lamps must be branded with a fuse base. When using mains voltage halogen lamps- dimmers should be de-rated by 25%. When using mains voltage halogen load transformer - maximum rating is 210VA. To only be used with Touch Master Dimmers</p>	

LRX4XTSEB-EBB

Linea-Rondo CFX Etrium Bronze Frame/Etrium Bronze Front 4 gang Multi-Way Touch Slave Controller Etrium Bronze/Black

<p>Patents and Trademarks</p>	<p>Linea is a Registered Trade Mark No 2398665 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B Community Trd Mark No. 002906428 Linea-Rondo CFX is a UK Registered Design Certificate No: R21=2106349 SS2=2106350</p>	
<p>All products listed conform to current British or European standard and the product information is correct at the time of going to press.</p>	<p>All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.</p>	<p>It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.</p>
<p>Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.</p>	<p>Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes.</p>	<p>Correct as at 16 October 2018 04:04 PM E&OE</p>

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ
 T: +44 (0)1747 860088 F: +44 (0)1179 710414
 E: info@hamilton-litestat.com www.hamilton-litestat.com

Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB
 Registered in London No. 941624 VAT Registration No. 222 6607 84



CERT. No. 14912238