

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, AMRLED4/GR/CPC... (IP65 Multiray LED Highb...

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

IP65 Multiray LED Highbay (Polycarbonate Cover)

AMRLED4/GR/CPC


Luminaire data

Luminaire efficiency : 91.7%
Luminaire efficacy : 101.48 lm/W
Classification : A60 ↓100.0% ↑0.0%
CIE Flux Codes : 80 99 100 100 92
UGR 4H 8H : 21.5 / 21.8
Power : 242 W
Luminous flux : 24558.2 lm

Equipped with

Quantity : 3
Designation :
Colour :
Luminous flux : 8927 lm

Dimensions : Ø345 mm x 109 mm

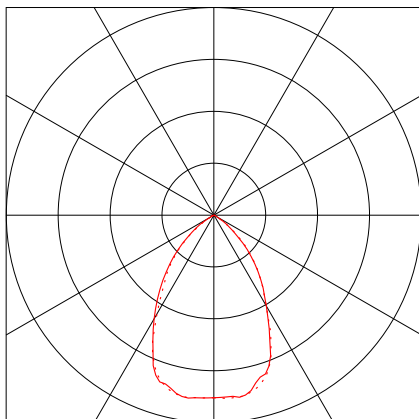


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, AMRLED4/GR/CPC... (IP65 Multiray LED Highb...)

1.1.2 LDC

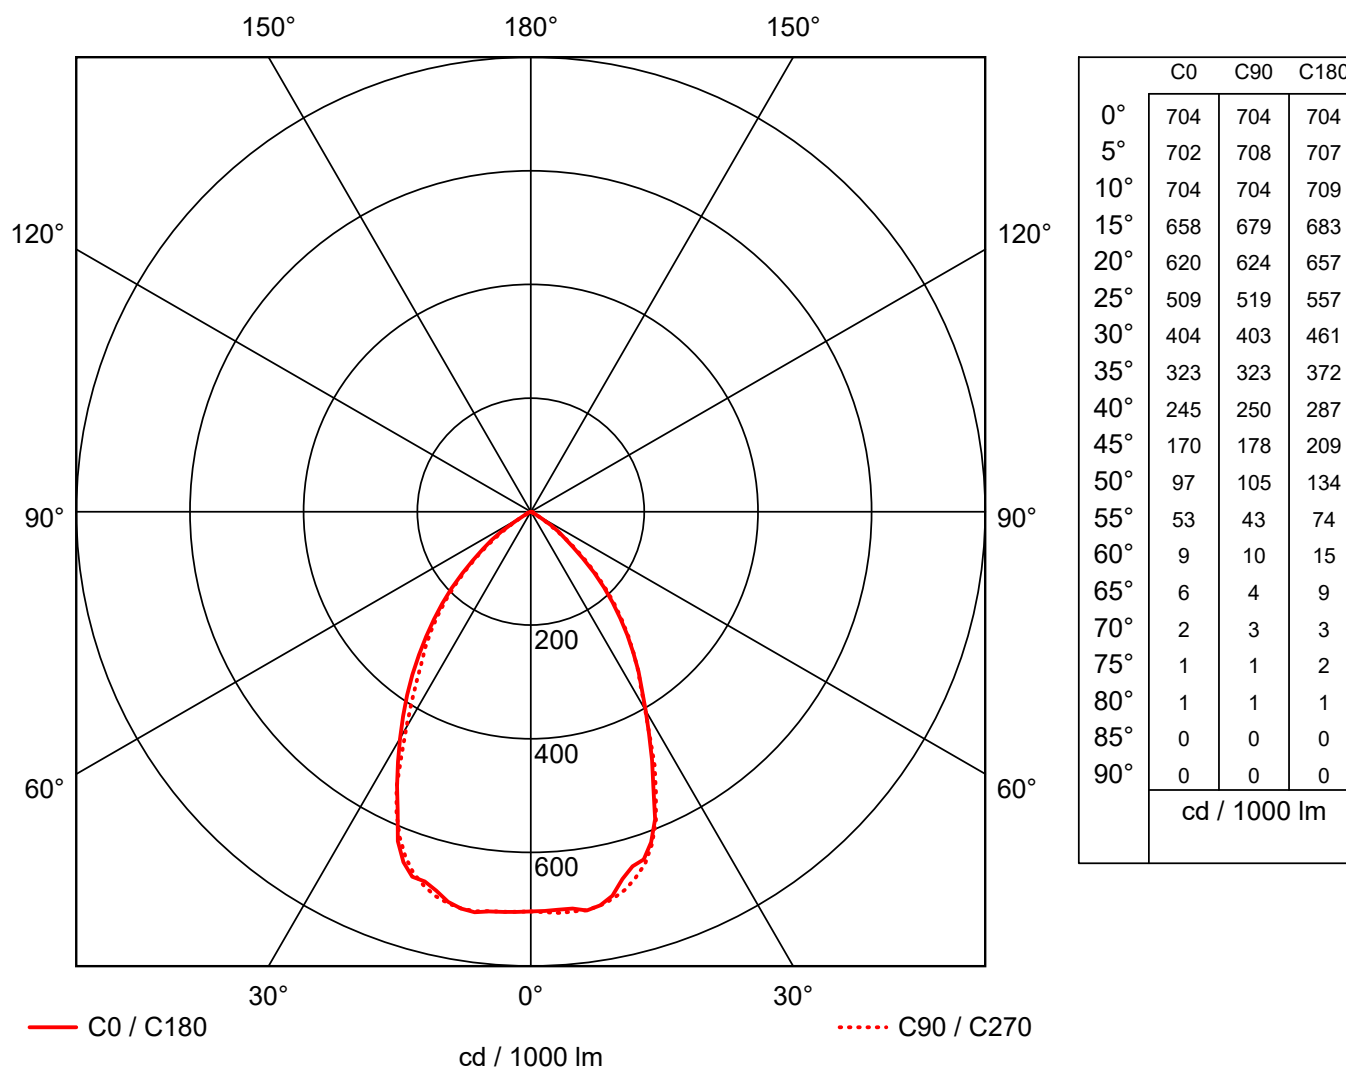

Manufacturer : ANSELL Lighting
Order number : IP65 Multiray LED Highbay (Polycart)
Luminaire name : AMRLED4/GR/CPC
Equipment : 3 x / 8927 lm
Dimensions : D 345 mm x H 109 mm
File name : rlx_20170830123842.ldt

Efficiency factor : 91.7%
Luminaire efficacy : 101.48 lm/W (A60)
Light distribution
Beam Angle : 33.0° C0
33.0° C90
36.0° C180
34.4° C270