

Object :
Installation :
Project number :
Date :

1 Luminaire data

1.1 Ansell Lightng, Pluto LED (APLULED)

1.1.1 Data sheet

Manufacturer: Ansell Lightng

APLULED Pluto LED


Luminaire data

Luminaire efficiency : 100%
Luminaire efficacy : 112.22 lm/W
Classification : A60 ↓99.8% ↑0.2%
CIE Flux Codes : 80 97 100 100 100
UGR 4H 8H : 13.2 / 12.2
Power : 32 W
Luminous flux : 3591 lm

Dimensions : 600 mm x 600 mm x 1 mm

Equipped with


Quantity : 1
Designation :
Colour :
Luminous flux : 3591 lm

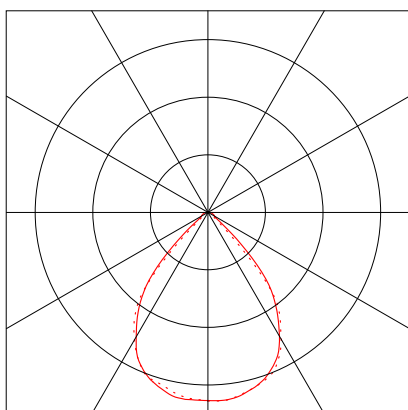

Object :
Installation :
Project number :
Date :

1.1 Ansell Lightng, Pluto LED (APLUED)

1.1.2 LDC

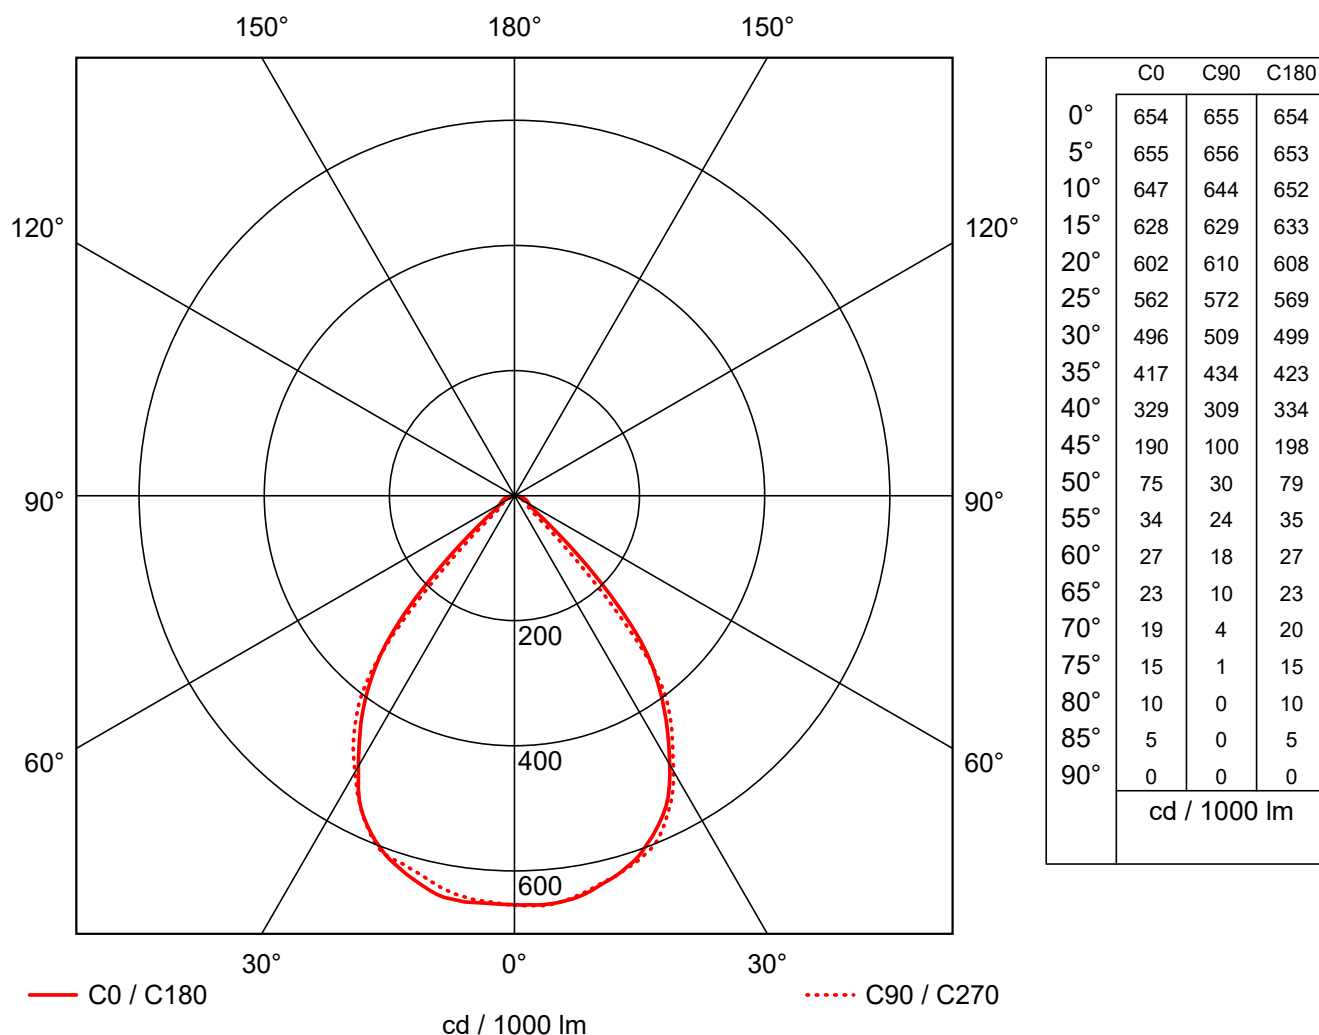

Manufacturer : Ansell Lightng
Order number : APLUED
Luminaire name : Pluto LED
Equipment : 1 x 32 W / 3591 lm
Dimensions : L 600 mm x W 600 mm x H 1 mm
File name : rlx_20180910071437.ltd

Efficiency factor : 100%
Luminaire efficacy : 112.22 lm/W (A60)
Light distribution
Beam Angle : 40.0° C0
39.5° C90
40.3° C180
40.2° C270