

Object :
Installation :
Project number :
Date :

1 Luminaire data

1.1 ANSELL Lighting, Sleek LED Polycarbonate Bulkhead (ASBLED)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

ASBLED Sleek LED Polycarbonate Bulkhead


Luminaire data

Luminaire efficiency : 73.4%
Luminaire efficacy : 73.4 lm/W
Classification : A41 ↓95.1% ↑4.9%
CIE Flux Codes : 46 75 93 95 73
UGR 4H 8H : 19.5 / 21.3
Power : 6 W
Luminous flux : 440.4 lm

Equipped with

Quantity : 1
Designation : LED
Colour :
Luminous flux : 600 lm


Dimensions : 125 mm x 245 mm x 81 mm

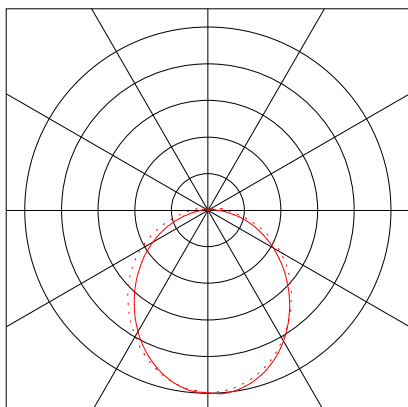

Object :
 Installation :
 Project number :
 Date :

1.1 ANSELL Lighting, Sleek LED Polycarbonate Bulkhead (ASBLED)

1.1.2 LDC

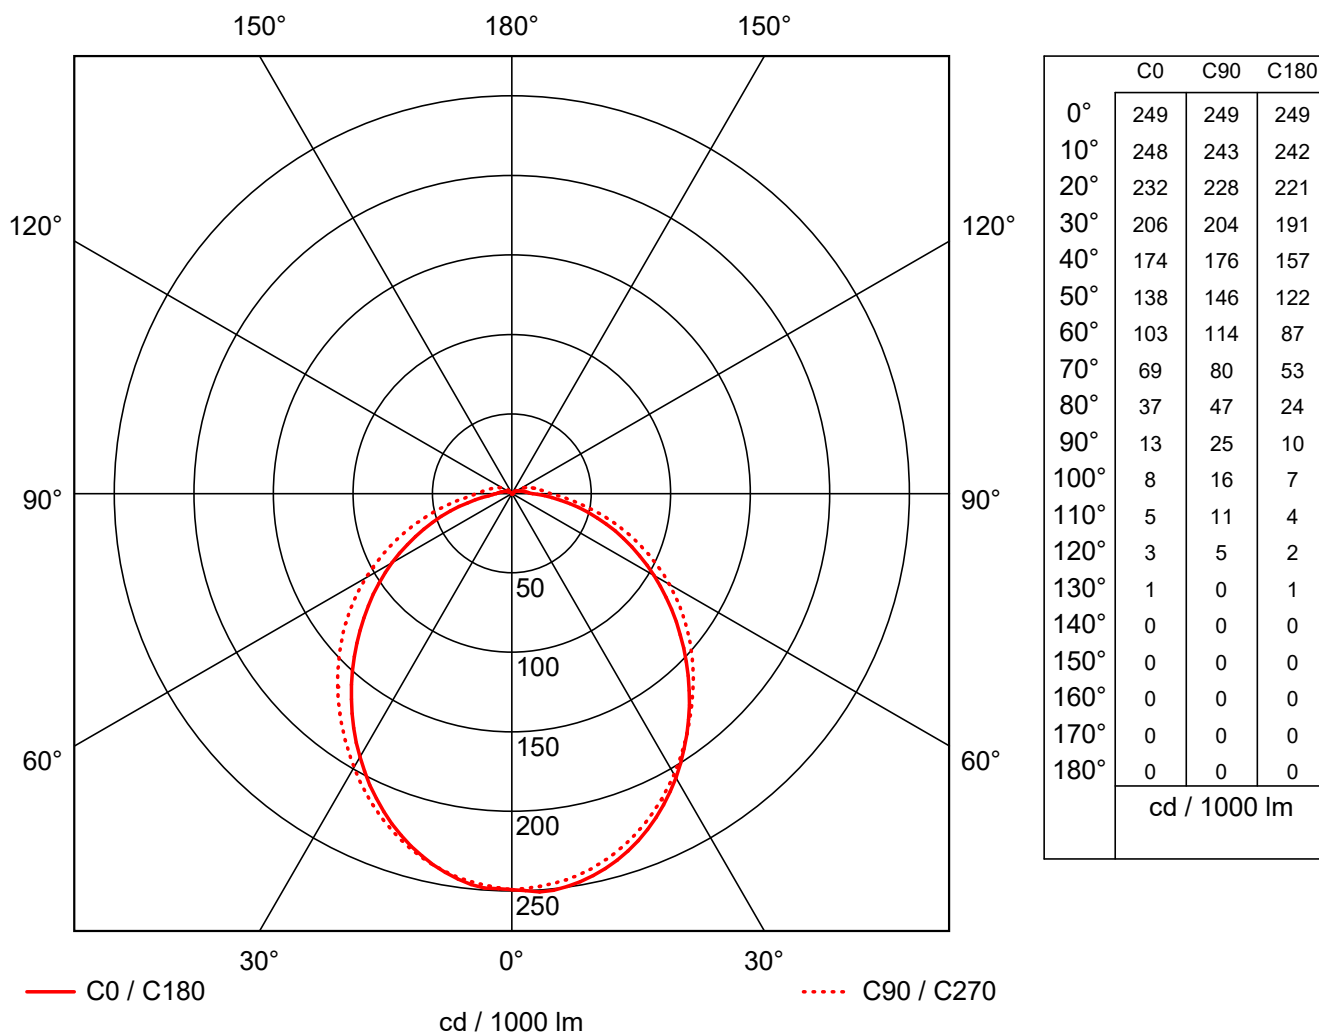

Manufacturer	: ANSELL Lighting	Efficiency factor	: 73.4%
Order number	: ASBLED	Luminaire efficacy	: 73.4 lm/W (A41)
Luminaire name	: Sleek LED Polycarbonate Bulkhead	Light distribution	
Equipment	: 1 x LED 6 W / 600 lm	Beam Angle	: 53.6° C0
Dimensions	: L 125 mm x W 245 mm x H 81 mm		: 56.6° C90
File name	: rlx_20170830195359.ldt		: 48.9° C180
			: 54.2° C270