

Object :
Installation :
Project number :
Date :



1 Luminaire data

1.1 ANSELL Lighting, Unity 150 LED Wallwash (AULED150WW)

1.1.1 Data sheet

Manufacturer: ANSELL Lighting

AULED150WW Unity 150 LED Wallwash


Luminaire data

Luminaire efficiency : 90.5%
Luminaire efficacy : 93.06 lm/W
Classification : A80 ↓99.2% ↑0.8%
CIE Flux Codes : 97 100 100 99 91
UGR 4H 8H : 14.2 / 14.0
Power : 29 W
Luminous flux : 2698.7 lm

Dimensions : Ø162 mm x 5 mm

Equipped with

Quantity : 1
Designation : 4000K
Colour :
Luminous flux : 2982 lm

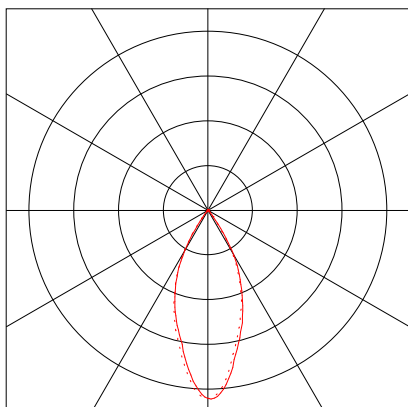


Object :
Installation :
Project number :
Date :



1.1 ANSELL Lighting, Unity 150 LED Wallwash (AULED150WW)

1.1.2 LDC

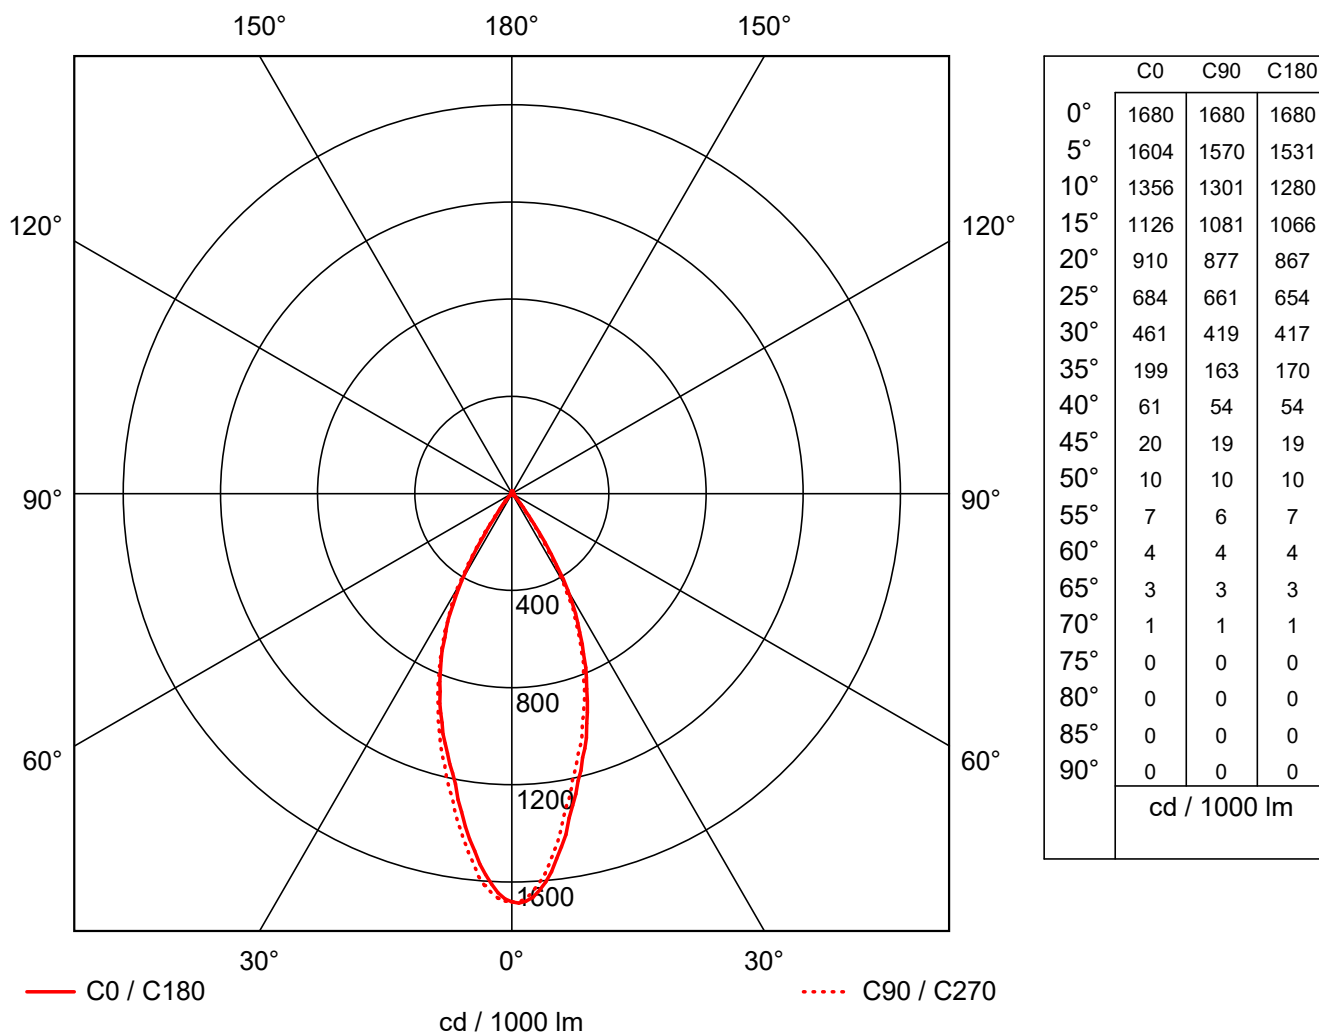

Manufacturer : ANSELL Lighting
Order number : AULED150WW
Luminaire name : Unity 150 LED Wallwash
Equipment : 1 x 4000K 29 W / 2982 lm
Dimensions : D 162 mm x H 5 mm
File name : rlx_20170830212330.ltd

Efficiency factor : 90.5%
Luminaire efficacy : 93.06 lm/W (A80)
Light distribution :
Beam Angle : 21.4° C0
20.7° C90
20.7° C180
21.2° C270