


1. USE

For recharging portable devices such as phones, smartphones, MP3 or MP4, loudspeakers, watches, game consoles, powerbanks.

2. RANGE

Designation	White	Aluminium
Single USB socket - 5 V \pm - 1.1 A	5 720 71	5 725 71

3. OVERALL DIMENSIONS

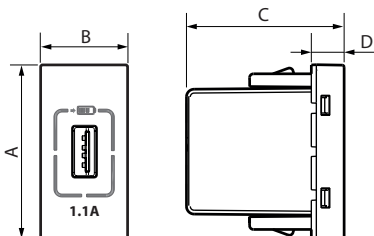

4. CONNECTION

Type of terminals: with screws
 Terminal capacity: 1 x 2.5 mm²
 Stripping length: 6 mm

Recommended use: circuit terminal outlet

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies/liquid: IP 40

■ 5.2 Material characteristics

Base: PC
 Cover: PC
 Colour: White RAL 9003
 Aluminium (painted)

Self-extinguishing:

+ 850° C / 30 s for insulating parts holding live parts in place.
 + 650° C / 30 s for other parts made of insulating materials.

5. TECHNICAL CHARACTERISTICS (continued)

■ 5.3 Electrical characteristics

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Nominal input voltage	100 - 240 V~
Nominal input frequency	50-60 Hz
Nominal input current	150 mA
Stand-by power consumption	< 0.07 W
Nominal output voltage	5 V \pm
Nominal output current	1.1 A

Efficiency can meet energy star level "V" (\geq 66% measured at USB socket output side)

Protection class	II - Low voltage
------------------	------------------

■ 5.4 Average charging time for a smartphone:

- 80 % charged < 1 h 15
- 100 % charged < 2 h 00

■ 5.5 Climatic characteristics

Storage temperature: - 20° C to + 70° C
 Operating temperature: 0° C to + 45° C

6. CLEANING

Surface cleaning with a cloth.
 Do not use: acetone, tar remover, trichloroethylene.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. STANDARDS AND APPROVALS

IEC 60950-1: low voltage directive.
 IEC 62684 / EN 50558 conform to the interoperability specifications of common external power supply (EPS) for use with mobile telephones.
 Conform to eco design directive 2009/125/EC.