
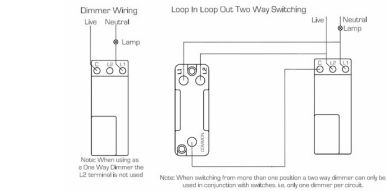



79C1X60

Hartland CFX Antique Brass 1 gang 600W Resistive Leading Edge Push On-Off Rotary 2 Way Switching Dimmer Antique Brass

| Item Image | Wiring | Dimensions |
|---|---|--|
|  |  <p>Note: When using as a One Way Dimmer the 2 terminals are used.</p> <p>Note: When switching from more than one position a two way dimmer can only be used in conjunction with switches, i.e. only one dimmer per circuit.</p> |  <p>Hamilton® HARTLAND CFX 1X60 Resistive Leading Edge Push On-Off Rotary 2 Way Switching Dimmer</p> |

| | | |
|---|--|---|
| Primary Range | Hartland CFX | |
| Insert Type | 1 gang 600W Resistive Leading Edge Push On-Off Rotary 2 Way Switching Dimmer | |
| Plate Finish | Hartland CFX Antique Brass | |
| Insert Colour | Antique Brass | |
| EAN13 Barcode | 5017504291457 | |
| Dimensions (Nominal) | Single: Height = 86.0mm Width = 86.0mm Depth = 5.0mm | |
| Fixing Hole Centres | Box Fixing = 60.3mm Grid Fixing = CFX Clips | |
| Minimum Wall Box Depth | 35mm | |
| Wattage | 600W | |
| Switched Poles | Single | |
| Current Rating | 2.5 Amp | |
| Voltage | 220/250V AC | |
| Maximum Load | 600W resistive Min Load 100W | |
| Mains Frequency | 50Hz | |
| IP Rating | IP2XD | |
| Contact Gap Minimum | N/A | |
| Terminal Capacity 1 | 2 x 1mm ² | |
| Terminal Capacity 2 | 2 x 1.5mm ² | |
| Earth Terminal Capacity 1 | 5 x 1mm ² | |
| Earth Terminal Capacity 2 | 4 x 1.5mm ² | |
| Earth Terminal Capacity 3 | 3 x 2.5mm ² | |
| Earth Terminal Capacity 4 | 1 x 4mm ² Multi-strand | |
| Earth Terminal Capacity 5 | 1 x 6mm ² | |
| Product Class 1 | Face plate must be earthed | |
| Ambient Operating Temperature | -5° to +40°C | |
| Recommended Location | Internal Use Only | |
| Maximum Installation Altitude | 2000m | |
| Standard/Approval | BS EN 60669-2-1 | |
| Additional Notes | Tungsten filament GU10 lamps must be branded with a fuse base. When using mains voltage halogen lamps- dimmers should be de-rated by 25%. When dimming LED lamps de-rated by 75% - please contact our Technical for compatibility. | |
| Patents and Trademarks | CFX is a Registered Trade Mark No 2398667 Hartland CFX is a Registered Design under Reference Nos. R21 = 3023446 SS2 =3023445 | |
| All products listed conform to current British or European standard and the product information is correct at the time of going to press. | All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System. | It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice. |
| Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding. | Due to manufacturing processes we cannot guarantee an exact colour match and shadings of of certain finishes. | Correct as at 16 October 2018 12:40 PM E&OE |

Hamilton[®]

making connections beautifully

SL

Wiring Accessories • Circuit Protection • Smart Lighting Control & Multi-room Audio