
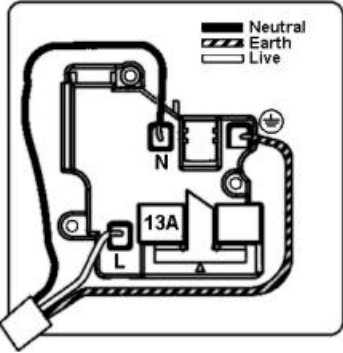


## ELMUS13GY

Elemento Grey IP66 1 gang Enclosure fitted with a Single 13 Amp Un-Switched Socket.

Item Image	Wiring	Dimensions
		

<b>Primary Range</b>	Elemento
<b>Insert Type</b>	Elemento Grey IP66 1 gang Enclosure
<b>Plate Finish</b>	High Grade Thermoset Plastic
<b>Insert Colour</b>	Grey / No Electrical Accessory Included
<b>EAN13 Barcode</b>	505275050200
<b>Dimensions (Nominal)</b>	(W) 110mm (H) 153mm (D) 95mm
<b>Weight</b>	
<b>Fixing Hole Centres</b>	60.3mm
<b>Minimum Wall Box Depth</b>	N/A
<b>Switched Poles</b>	N/A
<b>Current Rating</b>	13 Amp
<b>Voltage</b>	220 / 250V
<b>Maximum Load</b>	13 Amp
<b>Mains Frequency</b>	
<b>Contact Gap Minimum</b>	3mm
<b>Terminal Capacity 1</b>	4 x 2.5mm <sup>2</sup>
<b>Terminal Capacity 2</b>	3 x 4mm <sup>2</sup>
<b>Terminal Capacity 3</b>	2 x 6mm <sup>2</sup> Multi-Strand
<b>Terminal Capacity 4</b>	1 x 10mm <sup>2</sup>
<b>Earth Terminal Capacity 1</b>	4 x 2.5mm <sup>2</sup>
<b>Earth Terminal Capacity 2</b>	3 x 4mm <sup>2</sup>
<b>Earth Terminal Capacity 3</b>	2 x 6mm <sup>2</sup> Multi-Strand
<b>Earth Terminal Capacity 4</b>	1 x 1mm <sup>2</sup>
<b>Product Class 1</b>	Must be earthed
<b>Ambient Operating Temperature</b>	-5° to +40°C
<b>Recommended Location</b>	Internal Use Only
<b>Maximum Installation Altitude</b>	2000m
<b>Standard/Approval</b>	IP66
<b>Additional Notes</b>	Dual Earth: Yes
<b>Patents and Trademarks</b>	

All products listed conform to current British or European standard and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited. BS EN ISO 9001 : 2015 Quality Management System.	It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.
Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.	Correct at August 2018

R Hamilton & Co Ltd • Unit 10 Carrick Business Centre • 4-5 Bonville Road • Brislington • Bristol • BS4 5NZ  
 T: +44 (0)1747 860088 • F: +44 (0)1179 418713 • E: info@hamilton-litestat.com  
 www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory  
 J Berry • P McCourt • P Walker • AMH Hamilton (Secretary)  
 Registered Office: 1 Rushmills • Bedford Road • Northampton • NN4 7YB  
 Registered in London No. 941624 • VAT Registration No. 222 6607 84

