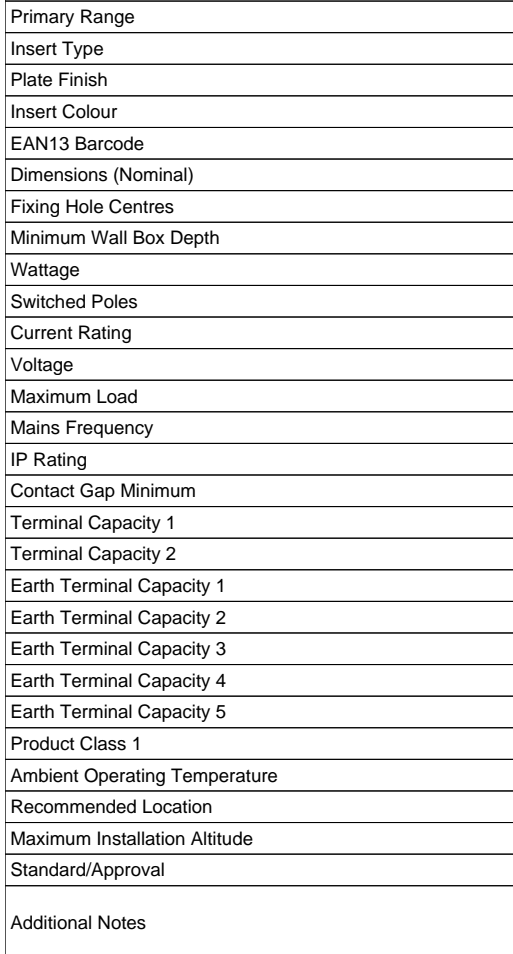
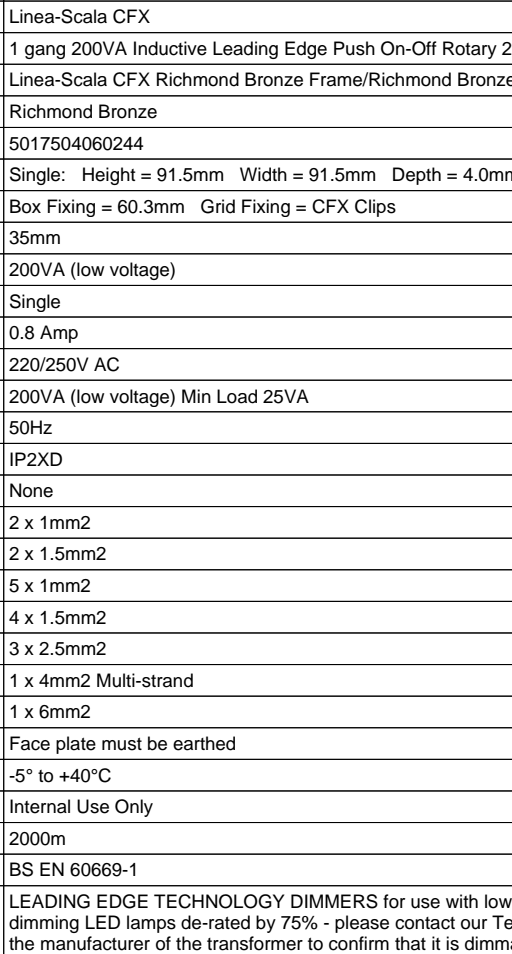



## LSX1X2VRB-RB

Linea-Scala CFX Richmond Bronze Frame/Richmond Bronze Front 1 gang 200VA Inductive Leading Edge Push On-Off Rotary 2 Way Switching Dimmer Richmond Bronze

| Item Image  | Wiring  | Dimensions   |
|---|---|--|
|  |    |  |
| Primary Range   | Linea-Scala CFX   |  |
| Insert Type   | 1 gang 200VA Inductive Leading Edge Push On-Off Rotary 2 Way Switching Dimmer   |  |
| Plate Finish  | Linea-Scala CFX Richmond Bronze Frame/Richmond Bronze   |  |
| Insert Colour   | Richmond Bronze   |  |
| EAN13 Barcode   | 5017504060244   |  |
| Dimensions (Nominal)  | Single: Height = 91.5mm Width = 91.5mm Depth = 4.0mm  |  |
| Fixing Hole Centres   | Box Fixing = 60.3mm Grid Fixing = CFX Clips   |  |
| Minimum Wall Box Depth  | 35mm  |  |
| Wattage   | 200VA (low voltage)   |  |
| Switched Poles  | Single  |  |
| Current Rating  | 0.8 Amp   |  |
| Voltage   | 220/250V AC   |  |
| Maximum Load  | 200VA (low voltage) Min Load 25VA   |  |
| Mains Frequency   | 50Hz  |  |
| IP Rating   | IP2XD   |  |
| Contact Gap Minimum   | None  |  |
| Terminal Capacity 1   | 2 x 1mm <sup>2</sup>  |  |
| Terminal Capacity 2   | 2 x 1.5mm <sup>2</sup>  |  |
| Earth Terminal Capacity 1   | 5 x 1mm <sup>2</sup>  |  |
| Earth Terminal Capacity 2   | 4 x 1.5mm <sup>2</sup>  |  |
| Earth Terminal Capacity 3   | 3 x 2.5mm <sup>2</sup>  |  |
| Earth Terminal Capacity 4   | 1 x 4mm <sup>2</sup> Multi-strand   |  |
| Earth Terminal Capacity 5   | 1 x 6mm <sup>2</sup>  |  |
| Product Class 1   | Face plate must be earthed  |  |
| Ambient Operating Temperature   | -5° to +40°C  |  |
| Recommended Location  | Internal Use Only   |  |
| Maximum Installation Altitude   | 2000m   |  |
| Standard/Approval   | BS EN 60669-1   |  |
| Additional Notes  | LEADING EDGE TECHNOLOGY DIMMERS for use with low voltage toroidal transformers and some LED lamps. When dimming LED lamps de-rated by 75% - please contact our Technical for compatibility. NOTE:It is recommended to contact the manufacturer of the transformer to confirm that it is dimmable and is considered to be an inductive load. |  |

## LSX1X2VRB-RB

Linea-Scala CFX Richmond Bronze Frame/Richmond Bronze Front 1 gang 200VA Inductive Leading Edge Push On-Off Rotary 2 Way Switching Dimmer Richmond Bronze

|  |   |  |
|--|---|--|
| <p>Patents and Trademarks</p>  | <p>Linea is a Registered Trade Mark No 2398665<br/>                 CFX is a Registered Trade Mark No 2398667 Patent No. GB 2383375B<br/>                 Linea-Perlina CFX SS2 is a UK Registered Design Certificate No. 2066588</p> |  |
| <p>All products listed conform to current British or European standard and the product information is correct at the time of going to press.</p> | <p>All accessories are manufactured under an accredited BS EN ISO 9001 : 2015 Quality Management System.</p>  | <p>It is the policy of the company to improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.</p> |
| <p>Illustrations and diagrams are reproduced within the limitations of reproduction and printing process and are not binding.</p>                | <p>Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.</p>   | <p>Correct as at 17 October 2018 08:31 AM<br/>E&amp;OE</p>   |

R Hamilton & Co Ltd, Unit 10 Carrick Business Centre, 4-5 Bonville Road, Brislington, Bristol, BS4 5NZ  
 T: +44 (0)1747 860088 F: +44 (0)1179 710414  
 E: info@hamilton-litestat.com www.hamilton-litestat.com

Registered Office 1 Rushmills, Bedford Road, Northampton NN4 7YB  
 Registered in London No. 941624 VAT Registration No. 222 6607 84



CERT. No. FA11138