

Maxi Pizza LED

Designed, Developed &
Manufactured in the UK



Colour Finish




Black
MP/**B**



White
MP/**W**



Titanium
MP/**X**

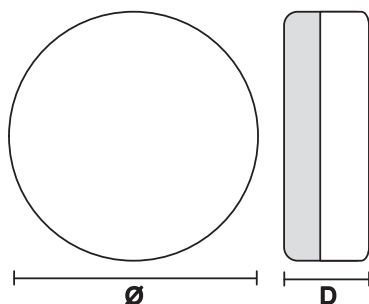

Size

Diameter	360mm
Depth	104mm

LED Types

- LED 1800.
- LED 3000.

Material 1 (Polycarbonate)

- Body: Vandal resistant polycarbonate self-extinguishing fire properties in black / white / Titanium.
- Diffuser: Vandal resistant polycarbonate in opal, with self-extinguishing fire properties.

Material 2 (Die Cast Aluminium)

- Body: Die cast aluminium.
- Diffuser: Vandal resistant polycarbonate in opal, with self-extinguishing fire properties.


Installation

- Wall or ceiling mount.
- BESA fixing and rear cable entry.
- 3 way mains terminal block. 4 way terminal block for emergency & photocell versions.
- Screw down diffuser (with anti tamper screws on request).
- Photocell version - external use only.
- Microwave sensor option (internal use only).
- e-Motion™ Master (internal only) and Slave options available.


Standards

- IP65.
- 'F' Mark.
- CE.
- BS EN 60598.
- Class I.

MP/BL4LED1800



MP/BL4LED3000



Code	Colour	Diffuser	Colour Temp.	System Power	Delivered Lumens	Efficacy
MP/BL4LED1800	White	Premium Opal	4000 K	16.5 W	1550 lm	94 lm/W
MP/BL4LED3000	White	Premium Opal	4000 K	25.4 W	2507 lm	98 lm/W

Code options (add suffix to code)



3 Hour Maintained Emergency
M (105 - 175 lm)



DALI / DSI Dim
-DDD



Daylight Monitoring
-CFDP



Analogue Dim
-DA



Microwave On/Off
-9



Switch Dim
-DD



Photocell
C



Anti-Tamper Screws
T



Self-Test Emergency
Prefix **MPST**/ Suffix **M**

Metal Base Option
MPM/__

* MP/BL4LED3000 Emergency option available at a reduced output.